


SL-77 STAND ALONE SLEEVE APPLICATOR



Specification

- Supply Voltage: 220 VAC 50/60 HZ 1 Phase
- Power Consumption: 1KW
- Sleeve speed: 100BPM Max.
- Label size: 22~150mm L
- Bottle Diameter: 30 ~ 90mm
- Height of Bottle: 35~350mm Max.
- Range of Label Thickness: 0.035mm ~ 0.08mm
- Inner Core: 127~254mm
- Dimensions: 700mm(W)×1000mm(D)×2000mm(H)

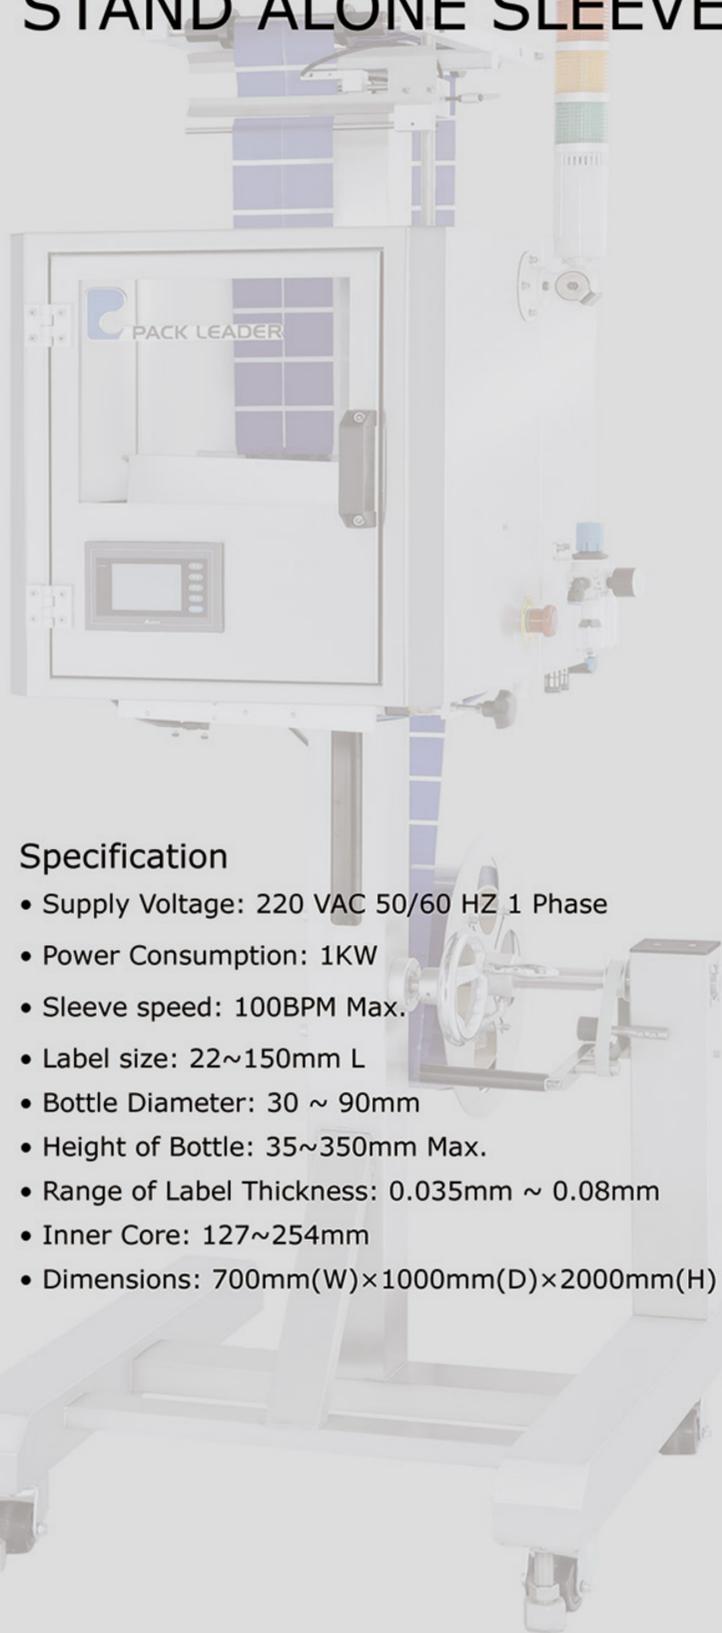

SL-77

STAND ALONE SLEEVE APPLICATOR

Pack Leader's series of shrink sleeve labeling machines is designed for full body sleeve labeling applications, as well as neck and cap banding, tamper-evident applications. Pack Leader's SL-77 provide flexible and economical shrink at low to moderate speed.

The color touch screen allows operators to access machine functions and to store recipe settings for container and sleeve material combinations. These machine settings can be quickly and easily retrieved for fast changeover. The alarm tower and user friendly HMI features error message and feedback information.

The control system is pneumatically operated but keeps the flexibility of sleeve length. The machine is constructed of stainless steel to ensure structural strength and superior performance. The stand with mobility castors are designed to flexibly move the machinery in operation.

With the Pack Leader shrink labeling models differing only in size and labeling speed, the SL Series is well-suited for a wide variety of industries and applications, although the machines' tamper-resistant "neckbander" is ideal for food, beverage, pharmaceutical and cosmetic companies. SL-77 can be incorporated into user's existing conveyor or can be supplied with Pack Leader conveying system. Optional shrink tunnel available.

With all of Pack Leader's high-quality products, customers from around the world receive support exactly when they need it – benefiting from 24x7 customer service from the company's expert, U.S.-based support team.

Flexible

- The flexibility inherent in Pack Leader's SL Series accommodates a wide range of label roll sizes.

Efficient

- The SL Series' integrated touch-screen controls bring ease of use to the operator, while increasing efficiency and productivity for each project.
- The SL Series' film-feeding device is automatically driven, thus eliminating the need for manual adjustment. During film changeover, the operator simply places the roll on the machine and it automatically adjusts for production efficiency.
- The SL Series' battery-free microprocessor control system can maintain default settings and job memory even after machine sits idle for a period of time.
- The Production Preset function enables the machine to automatically stop once the preset quantity of products has been labeled.
- The Monitor setting provides data records to help track maintenance and usage.
- The Multi-Alarm settings, through buzzers and flashing lights, alert the operator about various errors (e.g., bottle jams, bottles falling, labels running out, etc.).

Practical

- The SL Series features a management setting with password protection, which allows management to have more capabilities, while restricting access to those directly involved with the project at hand.
- Manufactured under strict ISO 9001 quality control procedures, the machines are built from durable stainless steel and anodized aluminum to protect against harsher environments and to withstand heavy usage from three shift operations.
- All SL Series machines are fully enclosed and well-suited for simple and quick changeovers, with built-in mobility castors that enable easy movement from one production area to the next.

PACK LEADER MACHINERY INC.

No. 60, 32nd. Rd. Taichung Industrial Park,
Taichung 40768, Taiwan.
TEL: +886-4-23592366 FAX: +886-4-23592368
English Service Land Line : +886-4-2355-2168
Http://www.packleader.com
E-mail: sales@packleader.com.tw

PACK LEADER MACHINERY INC.

#141/5 "Lilavathi Smruthi Vihar" above Goa
State Co-op bank Murdi, Cansaulim,
Salcete Goa 403712 India
TEL: +91-832-322-1538 FAX: +91-832-288-4355
E-mail: pl-india@packleader.com.tw

PACK LEADER USA, LLC

3951 E. 137th Terrace
Grandview, MO 64030 U.S.A.
TEL: 816-581-4330 FAX: 816-581-4338
Http://www.packleaderusa.com
E-mail: equipment@packleaderusa.com