


**IS-2000C
IS-2000F
ALUMINUM FOIL INDUCTION SEALING MACHINE**

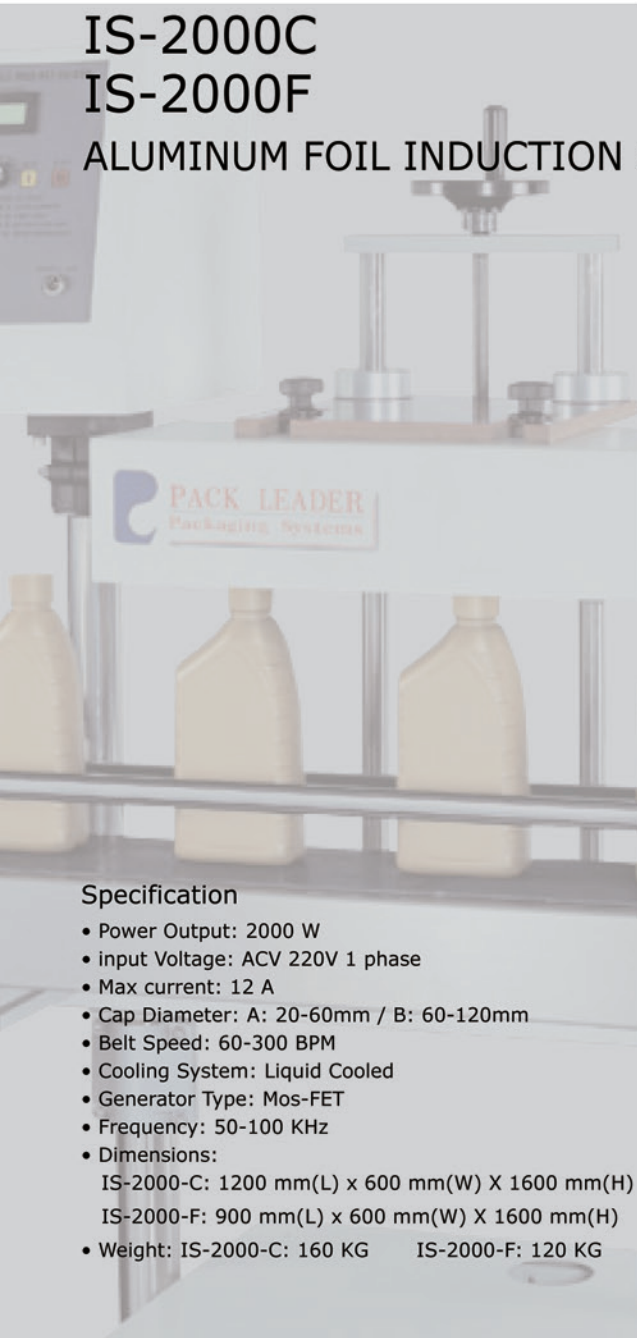

Specification

- Power Output: 2000 W
- input Voltage: ACV 220V 1 phase
- Max current: 12 A
- Cap Diameter: A: 20-60mm / B: 60-120mm
- Belt Speed: 60-300 BPM
- Cooling System: Liquid Cooled
- Generator Type: Mos-FET
- Frequency: 50-100 KHz
- Dimensions:
 - IS-2000-C: 1200 mm(L) x 600 mm(W) X 1600 mm(H)
 - IS-2000-F: 900 mm(L) x 600 mm(W) X 1600 mm(H)
- Weight: IS-2000-C: 160 KG IS-2000-F: 120 KG

IS-2000C



IS-2000C IS-2000F

ALUMINUM FOIL INDUCTION SEALING MACHINE

- Fast and efficient. The foil seals tightly without being affected by moisture, grease or powder contamination on the sealing area.
- The built-in protection system can automatically detect electric current overload, temperature overload, low water level and the wrong electrical phase.
- The cooling system is forced circulation design. The coolant is continuously re-circulated.
- The cooling effect can be kept for a long time due to the low coolant loss.
- The mainframe uses water cooled design that is superior to air cooled model which has thermal overload problem.
- The machine uses the solid state power transistor module design for high efficiency, stable output, easy repair and maintenance.
- The foot stands uses stainless steel and high strength aluminum alloy which are surface treated for superior finish.



IS-2000F

PACK LEADER MACHINERY INC.

No. 60, 32nd. Rd. Taichung Industrial Park,
Taichung 40768, Taiwan.
TEL: +886-4-23592366 FAX: +886-4-23592368
English Service Land Line : +886-4-2355-2168
Http://www.packleader.com
E-mail: sales@packleader.com.tw

PACK LEADER MACHINERY INC.

#141/5 "Lilavathi Smruthi Vihar" above Goa
State Co-op bank Murdi, Cansaulim,
Salcete Goa 403712 India
TEL: +91-832-322-1538 FAX: +91-832-288-4355
E-mail: pl-india@packleader.com.tw

PACK LEADER USA, LLC

3951 E. 137th Terrace
Grandview, MO 64030 U.S.A.
TEL: 816-581-4330 FAX: 816-581-4338
Http://www.packleaderusa.com
E-mail: equipment@packleaderusa.com